

Custom Linings Sprayed on Bed Liners 1-877-POLYUREA

Custom Linings® 711 Two Component Modified Polyurea Protective Coating

DESCRIPTION

Custom Linings® 711 is a two component, 1:1, 100% solids, fast set, liquid applied, modified polyurea liner system for metal, concrete, fibre glass and wood surfaces.

FEATURES

- ❖ Seamless
- ❖ Tough and Elastomeric
- ❖ Chemical Resistance
- ❖ Low Temperature Flexibility
- ❖ Abrasion and Impact Resistant
- ❖ High Build
- ❖ Zero VOC
- ❖ Quick Drying

TYPICAL USES

- ❖ Cargo liners
- ❖ Utility Vehicles
- ❖ Truck Bed Surfaces
- ❖ Boat Linings
- ❖ Waterproof Decking
- ❖ Encapsulation of Fiberglass Bodies and Polystyrene Foams
- ❖ Cargo Holds
- ❖ Horse Trailers
- ❖ Industrial Floorings
- ❖ Walkways
- ❖ Containment Areas

COLOR

Black, Neutral or Gray

PACKAGING

107 gallon kit: 53.5 gallons (500 lbs. net) Part-A and 53.5 gallons (454 lbs. net) Part-B.

MIXING

Custom Linings® 711 may not be diluted under any circumstances. Thoroughly mix 711 Side-B Base material with air driven power equipment until a homogeneous mixture and color is obtained. Both Side-A and Side-B material should be at the temperature range of 130-140°F before application.

Side-B base material must be thoroughly agitated until a homogenous mixture is obtained. Do not allow air to be incorporated into the product. Total suspension must be achieved. Side-A Isocyanate requires no mixing.

COVERAGE

Custom Linings® 711 may be applied at any rate to achieve desired thickness. Theoretical coverage per gallon is 1600 sq. ft. at 1 mil.

SURFACE PREPARATION

In general, coating performance is directly proportional to surface preparation. All surfaces must be free of oil, grease, dirt and other contaminants.

Pick-Up Truck: Sanding and scuffing of the original paint finish is required to obtain a permanent bond of the spray-on liner to the pick-up truck bed.

TECHNICAL DATA (Based on compressed film)

Flash Point	>200°F
Density	8.9 lb/gal
Viscosity at 80°F (24°C), Brookfield,	
Part-A	700 ± 200 cps
Part-B	300 ± 100 cps
Spray Temperature	130-140°F
Mix Ratio, by volume	1A:1B
Pot Life, 135°F @ 50% R.H.	2-5 seconds
Hardness, ASTM D-2240	45 ± 5 Shore D
Tack Free Time, 135°F	30-50 seconds
Tensile, ASTM 412-C	2900 ± 300 psi
Elongation, ASTM 412-C	250 ± 20%
Tear, ASTM 624-C	375 ± 40 pli
Abrasion Resistance, H-18, 1000 Cycles, 1 Kg	100 ± 25 mg

After the vehicle is masked with paper and the surface has been thoroughly cleaned, sand the surface using 40 grit sanding discs on an autobody disc arbor.

In areas which cannot be accessed by power tools, surface preparation can be completed by hand using 80 or 100 grit sandpaper or a coarse scuffing pad such as Scotchbrite.

Take care that all edges at tape lines are well scuffed and sanded.

After sanding and scuffing the surface must be clean and dust free.

Concrete: Remove all contaminants such as oil, grease, dirt, form oil residue, wax or any other chemical product prior to proceeding with surface preparation. The surface should be free of voids, pot holes or bug holes, loose or weak concrete and the necessary surface profile must be achieved as listed below to ensure proper adhesion and good surface appearance.

Abrasive blast using brush blast technique or better to achieve 1.5-3 mil anchor profile.

Vacuum to remove dust, etc., prior to application of primer.

Use fiberglass (C-Veil Glass) or a geotextile cloth to bridge cracks over the primed surface.

Primer is always recommended to take care of voids, pot holes or bug holes etc.

APPLICATION

Plural component, heated, high pressure 1:1 spray mixing equipment like Graco's Hydra Cat, Glas-Craft or other equivalent machine may be used.

Both Side-A and Side-B materials should be sprayed at temperatures above 130°F. Adequate pressure and temperature should be maintained at all times.

STORAGE

Custom Linings® 711 has a shelf life of six months from date of manufacture in original, factory sealed containers.

LIMITATIONS

Due to its aromatic composition, Custom Linings® 711 will tend to yellow or darken in color after exposure to UV light. Choose to apply dark colors that will not show the effects of UV light (black, battleship gray, ect) or you may choose to topcoat, with a product such as MPL Topcoat an aliphatic polyurethane coating for a color-fast glossy finish.

Do not open until ready to use.

Avoid exposure to freezing temperatures for an extended period of time.

Store drums on wooden pallets to avoid direct contact with the ground. If stored for a long period of time, rotate Side-A drums regularly.

Both Side-A and Side-B containers must be fitted with a desiccant device during use.

WARNING

This product contains isocyanate and curative material.

Please read all information in the general guidelines, product data sheets, guide specifications and material safety data sheets (MSDS) before applying material. Published technical data and instructions are subject to change without notice. Contact your local Custom Linings representative or visit our website for current technical data and instructions.

SAFETY PRECAUTIONS

This product is for industrial use only by professional applicators and is not intended or suitable for use in or around a household or residential property. Keep away from children and household items. This material contains polyisocyanates. Vapors and spray mist are harmful. Improper handling and use may be hazardous. At all times safety precautions must be strictly followed during storage, handling and application.

WARNING

Individuals with chronic respiratory problems or prior respiratory reactions to such materials should not be exposed to vapors. All personnel entering the application area, including the applicator must wear properly fitted, NIOSH/MSHA approved, fresh air positive pressure air respirators with a full face piece or an air supplied hood.

Keep the material away from sparks, flash and open flames. Containers, even those that have been emptied, may contain dangerous and explosive vapors. Do not cut, drill, grind, weld or perform similar operations on or near containers. Do not pressurize containers to empty them.

LIMITED WARRANTY

Custom Linings warrants its products to be free of manufacturing defects and that they will meet Custom Linings current published physical properties. Custom Linings warrants that its products, when properly installed by a licensed applicator according to Custom Linings guide specifications and product data sheets over a sound, properly prepared substrate, will not allow water migration for a period of three (3) years. Seller's and manufacturer's sole responsibility shall be to replace that portion of the product of this manufacturer which proves to be defective. There are no other warranties by Custom Linings of any nature whatsoever expressed or implied, including any warranty of merchantability or fitness for a particular purpose in connection with this product. Custom Linings shall not be liable for damages of any sort, including remote or consequential damages resulting from any claimed breach of any warranty whether expressed or implied. Custom Linings shall not be responsible for use of this product in a manner to infringe on any patent held by others. In addition, no warranty or guarantee is being issued with respect to appearance, color, fading, chalking, staining, shrinkage, peeling, normal wear and tear or improper application by the applicator. Damage caused by abuse, neglect and lack of proper maintenance, acts of nature and/or physical movement of the substrate or structural defects are also excluded from the limited warranty. Custom Linings reserves the right to conduct performance tests on any material claimed to be defective prior to any repairs by owner, general contractor, or applicator.

DISCLAIMER

All guidelines, recommendations, statements, and technical data contained herein are based on information and tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as a warranty, either expressed or implied. It is the users responsibility to satisfy himself, by his own information and test, to determine suitability of the product for his own intended use, application and job situation and user assumes all risk and liability resulting from his use of the product. We do not suggest or guarantee that any hazard listed herein are the only ones which may exist. Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use, the product. Recommendations or statements, whether in writing or oral, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by a corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Custom Linings makes no claim that these tests or any other tests, accurately represent all environments.

MATERIAL SAFETY DATA SHEET

PRODUCT NAME: 711 Side-A

SECTION I - MANUFACTURER IDENTIFICATION


MANUFACTURER'S NAME: Custom Linings

ADDRESS: 15790 Fairway Drive, Buena Vista, Colorado 81211

INFORMATION PHONE: 719-395-4414

EMERGENCY CONTACT: 888-878-5233

DATE REVISED: January 2003

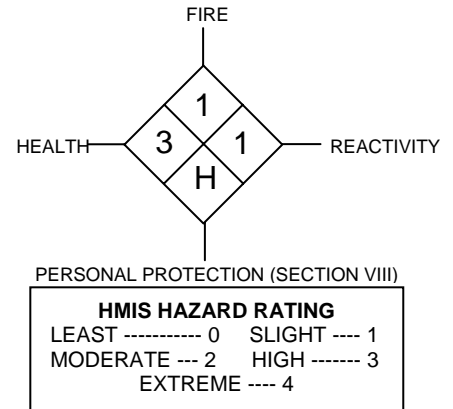

SECTION II - HAZARDOUS INGREDIENTS/SARA III INFORMATION

HAZARDOUS COMPONENTS	OCCUPATIONAL EXPOSURE LIMITS				VAPOR PRESSURE	
	CAS NUMBER	OSHA PEL (CEILING)	ACGIH TLV	MFG TLV	mm Hg	@ TEMP
*4,4'-DIPHENYLMETHANE DIISOCYANATE	101-68-8	.02 ppm	.005 ppm		<5.0	25°C (77°F)
URETHANE PREPOLYMER		N/E		N/E		

* Indicates toxic chemical(s) subject to the reporting requirements of section 313 of Title III and of 40 CFR 372.

SECTION III - PHYSICAL/CHEMICAL CHARACTERISTICS

BOILING POINT: >150°C (>302°F)

SPECIFIC GRAVITY: (H₂O=1): 1.01

VAPOR DENSITY: Heavier than air

EVAPORATION RATE: Slower than ether

SOLUBILITY IN WATER: Reacts with water

APPEARANCE AND ODOR: Clear, mild aromatic

SECTION IV - FIRE AND EXPLOSION HAZARD DATA

FLASH POINT: 302°F

METHOD USED: PMCC

FLAMMABLE LIMITS IN AIR BY VOLUME: Lower: N/E

Upper: N/E

EXTINGUISHING MEDIA: Dry chemical, foam, carbon dioxide, avoid use of water.

SPECIAL FIRE FIGHTING PROCEDURES: Wear NIOSH approved self contained breathing apparatus in positive pressure mode with full-face piece. Boots, gloves (neoprene), goggles, and full protective clothing are also required. Excessive pressure or temperature may cause rupture of sealed containers.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Water contamination will produce carbon dioxide. Do not reseal contaminated containers as pressure buildup may rupture them.

SECTION V - REACTIVITY DATA

STABILITY: Stable under normal conditions.

CONDITIONS TO AVOID: Do not expose container to high temperature (400 Degrees F.) or to moisture. Contact with heat or moisture can cause CO₂ gas to form and could rupture container.

INCOMPATIBILITY (MATERIALS TO AVOID): This product will react with any material containing active hydrogens, such as water, alcohol, ammonia, amines, alkalis and acids. The reaction with water is very slow under 50°C, but is accelerated at higher temperature and in the presence of alkalis, tertiary amines, and metal compounds. Some reactions can be violent. Keep away from strong oxidizers such as hydrogen peroxide, bromine and chronic acid.

HAZARDOUS DECOMPOSITION OR BY-PRODUCTS: When mixed with incompatible materials, may produce: carbon dioxide, carbon monoxide, nitrogen oxides, sulfur oxides, ammonia, trace amounts of hydrogen cyanide and unidentified organic compounds.

HAZARDOUS POLYMERIZATION: May occur. High temperatures, above 400 Degrees F. in the presence of moisture alkalis, tertiary amines, and metal compounds will accelerate polymerization.

SECTION VI - HEALTH HAZARD DATA

SKIN CONTACT: Isocyanates react with skin protein and moisture and can cause irritation. Prolonged contact can cause reddening, swelling, rash, scaling, blistering, and, in some cases, skin sensitization. Individuals who have developed a skin sensitization can develop these symptoms as a result of contact with very small amounts of liquid material or as a result of exposure to vapor. Animal tests have indicated that respiratory sensitization can result from skin contact with MDI prolonged skin contact may, under extreme conditions, cause skin cancer. This reinforces the need to prevent direct skin contact with the product.

EYE CONTACT: Liquid, aerosols or vapors are severely irritating and can cause pain, tearing, reddening and swelling. Prolonged vapor contact may cause conjunctivitis. Any level of contact should not be left untreated.

SKIN ABSORPTION: Systemically toxic concentrations of this product will probably not be absorbed through human skin.

INGESTION: Can result in irritating and corrosive action in the mouth, stomach tissue and digestive tract. Symptoms can include sore throat, abdominal pain, nausea, vomiting and diarrhea.

INHALATION: MDI vapors or mist at concentrations above the TLV can irritate (burning sensation) the mucous membranes in the respiratory tract (nose, throat, lungs) causing runny nose, sore throat, coughing, chest discomfort, shortness of breath and reduced lung function (breathing obstruction). High vapor concentrations may cause central nervous system (CNS) depression as evidenced by giddiness, headache, dizziness, and nausea. Persons with a preexisting, non-specific bronchial hyperactivity can respond to concentrations below the TLV with similar symptoms as well as asthma attack. Exposure well above the TLV may lead to bronchitis, bronchial spasm and pulmonary edema (fluid in lungs). As a result of previous repeated overexposures or a single large dose, certain individuals may develop isocyanate sensitization (chemical asthma) which will cause them to react to a later exposure to isocyanate at levels well below the TLV. Similar to many non-specific asthmatic responses, there are reports that once sensitized an individual can experience these symptoms upon exposure to dust, cold air or other irritants. This increased lung sensitivity can persist for weeks and in severe cases for several years. Chronic overexposure to isocyanate has also been reported to cause lung damage (including decrease in lung function) which may be permanent. Sensitization can either be temporary or permanent.

HEALTH HAZARDS: ACUTE: Exposure may cause mucous membrane and respiratory tract irritation, tightness of chest, headache, shortness of breath, and a dry cough. At concentrations exceeding current occupational limits and for sensitized individuals at levels less than or greater than current occupational limits, asthma-like symptoms may occur. These symptoms may include coughing, wheezing, and shortness of breath. A hypersensitive pneumonitis may also occur if the person is sensitized. This syndrome is characterized by fever, nonproductive cough, wheezing, chills, and shortness of breath. Central nervous system (CNS) depression may also result. The effects of acute exposure may be delayed in onset up to 12-24 hours. **CHRONIC:** Repeated exposure above current occupational limits may cause an allergic sensitization of the respiratory tract. This is characterized by an asthma-like response upon re-exposure to the chemical. The symptoms may include coughing, wheezing, shortness of breath and chest tightness, and may be fatal. Central nervous system (CNS) depression may also result; unconsciousness and death may occur in extreme cases.

CARCINOGENICITY: NTP: No IARC Monographs: No OSHA Regulated: No

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE: Cardiovascular disease, asthma or asthmatic bronchitis, emphysema, allergic disease, dermatitis, chronic respiratory disease, sinusitis, headache and dizziness.

EMERGENCY AND FIRST AID PROCEDURES: EYE CONTACT: Immediately flush eyes with plenty of water, preferably lukewarm. After initial flushing, remove any contact lenses and continue flushing for at least 15 minutes. Have eyes examined and treated by medical personnel. **INHALATION:** Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing is labored, give oxygen. Consult medical personnel. **SKIN CONTACT:** Wash material off the skin thoroughly with plenty of soap and water. If redness, itching, or a burning sensation develops, get medical attention. Wash contaminated clothing and decontaminate footwear before reuse. **INGESTION:** Do not induce vomiting. Give 1-2 glasses of milk or water to drink and refer person to medical personnel. Do not give anything by mouth to an unconscious person.

SECTION VII - PRECAUTIONS FOR SAFE HANDLING AND USE

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Wear skin, eye, and respiratory protection during cleanup. Soak up material with absorbent and shovel into a chemical waste container. Cover container, but do not seal, and remove from work area. Prepare a decontamination solution of 2.0% liquid detergent and 3-8% ammonia in 90% water. Follow the precautions on the supplier's material safety data sheets. All operations should be performed by trained personnel familiar with the hazards of the chemicals used. Treat the spill area with the decontamination solution, using about 10 parts of solution for each part of the spill, and allow it to react for at least 15 minutes. Carbon dioxide will be evolved, leaving insoluble polyureas. Residues not reacted from spill

cleanup, even when treated as described may continue to be regulated under provisions of RCRA and require storage and disposal as hazardous waste. For major spills, call CHEMTREC (Chemical Transportation Emergency Center) at 800-424-9300.

WASTE DISPOSAL METHOD: Slowly stir the isocyanate waste into the decontamination solution described above using 10 parts of the solution for each part of the isocyanate. Let stand for 48 hours, allowing the evolved carbon dioxide to vent away, residues may still be subject to RCRA storage and disposal requirements. Dispose off in compliance with all relevant local, state, and federal laws and regulations regarding treatment.

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING: Keep in cool, dry, ventilated storage area, in closed containers and out of direct sunlight. Keep containers closed when not in use. Do not store in containers made of copper, copper alloys or galvanized containers. Ideal storage temperature is 50 –100 degrees F.

OTHER PRECAUTIONS: Prevent skin and eye contact, observe TLV limitations. Avoid breathing vapors. Workers should shower and change to fresh clothing after each shift. A sensitized individual should not be exposed to the product that caused the sensitization. Air circulation and exhaustion of isocyanate vapors must be maintained until the coatings have fully cured to insure that no potential fire, explosion or health hazard remains. Warning properties (irritation of the eyes, nose and throat or odor) are not adequate to prevent chronic overexposure from inhalation. This product can produce asthmatic sensitization upon either single inhalation exposure to a relatively high concentration or upon repeated inhalation exposure to lower concentrations. Exposure to vapors of heated isocyanates can be extremely dangerous. Employee education and training in safe handling of this material is required under OSHA hazard communication standard. Individuals with existing respiratory disease such as chronic bronchitis, emphysema, or asthma should not be exposed to isocyanates. These individuals should be identified through baseline and annual evaluation and removed from further exposure. Medical examination should include medical history, vital capacity, and forced expiratory volume at one second.

SECTION VIII - CONTROL MEASURES

VENTILATION: If needed, use local exhaust ventilation to keep airborne concentrations below the TLV.

RESPIRATORY PROTECTION: If airborne concentrations exceed or are expected to exceed the TLV, use MSHA/NIOSH approved positive pressure supplied air respirator with a full-face piece or an air supplied hood. For emergencies, use a positive pressure self-contained breathing apparatus.

PROTECTIVE CLOTHING: Gloves determined to be impervious under the conditions of use should be worn always when working with this product. Depending on conditions of use, additional protection may be required such as apron, arm covers, or full body suit. Wash contaminated clothing before wearing.

NOTE: Clothing constructed of butyl rubber, viton, silver shield, Saranex coated Tyvek, as well as some nitrile rubber and polyvinyl alcohol (PVA) coated garments have demonstrated excellent resistance to permeation by isocyanate. Clothing constructed of Teflon, as well as some garments constructed of nitrile rubber, natural rubber and PVA exhibited limited resistance to permeation by isocyanate.

EYE PROTECTION: Goggles and/or full-face shield.

OTHER PROTECTIVE EQUIPMENT AND MEASURES: Unhindered access to eye wash station. As a general hygienic practice, wash hands and face after use. Showers and cleaning of clothes are recommended. Follow all label instructions. Educate and train employees in safe use of product.

SECTION IX - REGULATORY INFORMATION

DOT PROPER SHIPPING NAME: Not Regulated.

TOXIC SUBSTANCE CONTROL ACT: All chemicals comprising this product are listed on the TSCA inventory.

USER'S RESPONSIBILITY: A bulletin such as this cannot be expected to cover all possible individual situations. As the user has the responsibility to provide a safe workplace, all aspects of an individual operation should be examined to determine if, or where, precautions, in addition to those described herein, are required. Any health hazard and safety information herein should be passed on to your customers or employees, as the case may be.

DISCLAIMER: The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by use of this material. All chemicals may present unknown health hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards which exist. Final determination of suitability of the chemical is the sole responsibility of the user. No representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose or any other nature are made hereunder with respect to the information contained herein or the chemical to which the information refers. It is the responsibility of the user to comply with all applicable federal, state and local laws and regulations.

MATERIAL SAFETY DATA SHEET

PRODUCT NAME: 711 Side-B

SECTION I - MANUFACTURER IDENTIFICATION


MANUFACTURER'S NAME: Custom Linings

ADDRESS: 15790 Fairway Drive, Buena Vista, Colorado 81211

INFORMATION PHONE: 719-395-4414

EMERGENCY CONTACT: 888-878-5233

DATE REVISED: January 2003

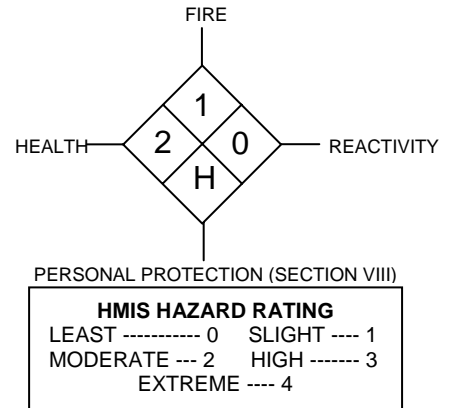

SECTION II - HAZARDOUS INGREDIENTS/SARA III INFORMATION

HAZARDOUS COMPONENTS	OCCUPATIONAL EXPOSURE LIMITS				VAPOR PRESSURE	
	CAS NUMBER	OSHA PEL	ACGIH TLV	MFG TLV	mm Hg	@ TEMP
AROMATIC AMINE	68479-98-1	N/E	N/E		0.001	20°C (68°F)

* No toxic chemical(s) subject to the reporting requirements of Section 313 of Title III and of 40 CFR 372.

SECTION III - PHYSICAL/CHEMICAL CHARACTERISTICS

BOILING POINT: 586°F

SPECIFIC GRAVITY: (H₂O=1): 0.98

COATING V.O.C.: N/A

VAPOR DENSITY: Heavier than air

EVAPORATION RATE: Slower than ether

SOLUBILITY IN WATER: Insoluble

APPEARANCE AND ODOR: Amber liquid, slight odor.

SECTION IV - FIRE AND EXPLOSION HAZARD DATA

FLASH POINT: >275°F

METHOD USED: TCC

FLAMMABLE LIMITS IN AIR BY VOLUME: Lower: N/E

Upper: N/E

EXTINGUISHING MEDIA: Dry chemical, foam, carbon dioxide, water spray (fog).

SPECIAL FIRE FIGHTING PROCEDURES: Wear NIOSH approved self-contained breathing apparatus in positive pressure mode with full face piece. Boots, gloves (neoprene), goggles, and full protective clothing are also required. Excessive pressure or temperature may cause rupture of containers.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Sudden reaction and foaming may result when the product is exposed to oxidizing agents.

SECTION V - REACTIVITY DATA

STABILITY: Stable under normal conditions.

CONDITIONS TO AVOID: High temperatures, open flame and moisture.

INCOMPATIBILITY (MATERIALS TO AVOID): This product will react with any material containing isocyanate.

HAZARDOUS DECOMPOSITION OR BY-PRODUCTS: Combustion products: organic vapors and thermal decomposition fragments.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION VI - HEALTH HAZARD DATA

SKIN CONTACT: Skin sensitization and irritation may develop after repeated and/or prolonged contact with human skin.

EYE CONTACT: Can induce irritation or chemical burns on contact with eyes.

SKIN ABSORPTION: Product may be absorbed through skin and cause nausea, headache, and general discomfort.

INGESTION: In humans, irritation or chemical burns of the mouth, pharynx, esophagus and stomach can develop following ingestion, and injury may be severe and cause death.

INHALATION: Vapors can irritate eyes, nose and respiratory passages. Severe overexposure may induce respiratory sensitization with asthma like symptoms. Symptoms include chronic cough, tightness of chest with difficulty in breathing. These symptoms may be immediate or delayed up to several hours after exposure. Chronic exposures may result in permanent decreases in lung function.

HEALTH HAZARDS: ACUTE: Exposure may cause skin and eye irritation, respiratory tract irritation. Chemical burns may result due to overexposure. Affects of exposure may be delayed. **CHRONIC:** Repeated and prolonged exposure at low levels may result in adverse skin and eye effects, liver and kidney disorders.

CARCINOGENICITY: NTP: No IARC Monographs: No OSHA Regulated: No

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE: Cardiovascular disease, asthma or asthmatic bronchitis, skin allergies, chronic respiratory disease, sinusitis, headache, dizziness, eye diseases.

EMERGENCY AND FIRST AID PROCEDURES: EYE CONTACT: Immediately flush eyes with plenty of water. After initial flushing, remove any contact lenses and continue flushing for at least 15 minutes. Have eyes examined and treated by medical personnel.

INHALATION: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing is labored, give oxygen. Consult medical personnel. **SKIN CONTACT:** Wash material off the skin with plenty of soap and water. If redness, itching, or a burning sensation develops, get medical attention. Wash contaminated clothing and decontaminate footwear before reuse.

INGESTION: Do not induce vomiting. Give 1 or 2 glasses of water to drink and refer person to medical personnel. Never give anything by mouth to an unconscious person.

SECTION VII - PRECAUTIONS FOR SAFE HANDLING AND USE

STEPS TO BE TAKEN IN CASE MATERIAL IS RELEASED OR SPILLED: Wear skin, eye, and respiratory protection during cleanup. Soak up material with absorbent and shovel into a chemical waste container. Cover container, but do not seal, and remove from work area. Residues from spill cleanup may continue to be regulated under provisions of RCRA and require storage and disposal as hazardous waste. For major spills, call CHEMTREC (Chemical Transportation Emergency Center) at 800-424-9300.

WASTE DISPOSAL METHOD: Residues may still be subject to RCRA storage and disposal requirements. Dispose off in compliance with all relevant local, state, and federal laws and regulations regarding treatment.

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING: Store in tightly sealed containers to protect from atmospheric moisture. Store in a dry area. Ideal storage temperature 50 – 100 Degrees F.

OTHER PRECAUTIONS: Prevent skin and eye contact, observe TLV limitations. Avoid breathing vapors. Workers should shower and change to fresh clothing after each shift. A sensitized individual should not be exposed to the product that caused the sensitization.

SECTION VIII - CONTROL MEASURES

VENTILATION: If needed, use local exhaust ventilation to keep airborne concentrations below the TLV. Exhaust air may need to be cleaned by scrubbers or filters to reduce environmental contamination.

RESPIRATORY PROTECTION: If airborne concentrations exceed or are expected to exceed the TLV, use MSHA/NIOSH approved positive pressure supplied air respirator with a full face piece or an air supplied hood. For emergencies, use a positive pressure self-contained breathing apparatus.

PROTECTIVE CLOTHING: Gloves determined to be impervious under the conditions of use should be worn always when working with this product. Depending on conditions of use, additional protection may be required such as apron, arm covers, or full body suit. Wash contaminated clothing before wearing.

EYE PROTECTION: Goggles and/or full-face shield.

OTHER PROTECTIVE EQUIPMENT AND MEASURES: Unhindered access to eye wash station. As a general hygienic practice, wash hands and face after use. Showers and cleaning of clothes are recommended.

SECTION IX - REGULATORY INFORMATION
--

DOT PROPER SHIPPING NAME: Not regulated.

TOXIC SUBSTANCE CONTROL ACT: All chemicals comprising this product are listed on the TSCA inventory.

USER'S RESPONSIBILITY: A bulletin such as this cannot be expected to cover all possible individual situations. As the user has the responsibility to provide a safe workplace, all aspects of an individual operation should be examined to determine if, or where, precautions, in addition to those described herein, are required. Any health hazard and safety information herein should be passed on to your customers or employees, as the case may be.

DISCLAIMER: The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by use of this material. All chemicals may present unknown health hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards which exist. Final determination of suitability of the chemical is the sole responsibility of the user. No representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose or any other nature are made hereunder with respect to the information contained herein or the chemical to which the information refers. It is the responsibility of the user to comply with all applicable federal, state and local laws and regulations.